



# Bobcat®

## COMPACT EXCAVATORS

### E26

Operating Weight

2,950 kg

Engine Power

18.5 kw

Bucket Capacity

0.072m<sup>3</sup>



Bobcat E26

Scan the code to watch E26 video

***One Tough Animal®***

# E26 — SPECIFICATIONS

## Weights

|                             |          |
|-----------------------------|----------|
| Operating weight (ISO 6016) | 2950 kg  |
| Ground pressure             | 28.4 kPa |

## Engine

|                           |                          |
|---------------------------|--------------------------|
| Make / model              | Kubota / D1305-E4B-BCZ-1 |
| Fuel                      | Diesel                   |
| Number of cylinders       | 3                        |
| Displacement              | 1.26 L                   |
| Maximum power (ISO 9249)  | 18.5 kW                  |
| Maximum torque (ISO 9249) | 81.3 Nm                  |

## Performance

|                                  |          |
|----------------------------------|----------|
| Digging force, arm (ISO 6015)    | 15780 N  |
| Digging force, bucket (ISO 6015) | 25140 N  |
| Drawbar pull                     | 29300 N  |
| Travel speed (low)               | 2.9 km/h |
| Travel speed (high)              | 5.2 km/h |

## Hydraulic System

|                  |   |
|------------------|---|
| Pump type        | Dual outlet variable displacement piston pump with gear pumps |
| Pump capacity    | 67.5 L/min  |
| Auxiliary flow   | 53.75 L/min   |
| Auxiliary relief | 180.0 bar   |

## Swing System

|                   |         |
|-------------------|---------|
| Boom swing, left  | 70.0°   |
| Boom swing, right | 55.0°   |
| Swing speed       | 9.3 RPM |

## Fluid Capacities

|                       |        |
|-----------------------|--------|
| Cooling system        | 4.4 L  |
| Engine oil and filter | 4.0 L  |
| Fuel tank             | 34.4 L |
| Hydraulic system      | 23.0 L |

## Standard Features


|  |                                       |
|--|---------------------------------------|
| 1550 mm dozer blade                              | Fingertip auxiliary hydraulic control |
| 300 mm rubber tracks                             | Horn                                  |
| Auto shift travel                                | Hydraulic joystick controls           |
| Auxiliary hydraulics with quick couplers on boom | Retractable seat belt                 |
| Blade float feature                              | Suspension seat                       |
| Control console locks                            | TOPS/ROPS* canopy 1                   |
| Cupholder  | Two-speed travel                      |
| Engine/hydraulic monitor with shutdown           | Work lights (boom mounted)            |
|  | Auto Idle                             |

1. Roll Over Protective Structure (ROPS) – Meets requirements of ISO 3471. Tip Over Protective Structure (TOPS) – Meets requirements of ISO 12117.

## Options


|   |                           |
|---|---------------------------|
| TOPS/ROPS cab with heater & air conditioner     | Travel motion alarm       |
| Deluxe cloth suspension seat                    | Mirror kit                |
| Auxiliary hydraulics with quick couplers on arm | Additional work light kit |
| X-change pin-on                                 |                           |
| Klacc coupler                                   |                           |
| Geith coupler                                   |                           |

## Working Range

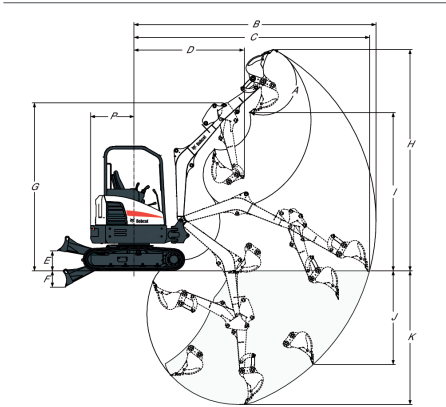

|     |           |     |           |
|-----|-----------|-----|-----------|
| (A) | 185.0°    | (G) | 3239.0 mm |
| (B) | 4990.0 mm | (H) | 4230.0 mm |
| (C) | 4876.0 mm | (I) | 3272.0 mm |
| (D) | 2135.0 mm | (J) | 1916.0 mm |
| (E) | 385.0 mm  | (K) | 2906.0 mm |
| (F) | 420.0 mm  |     |           |

## Dimensions

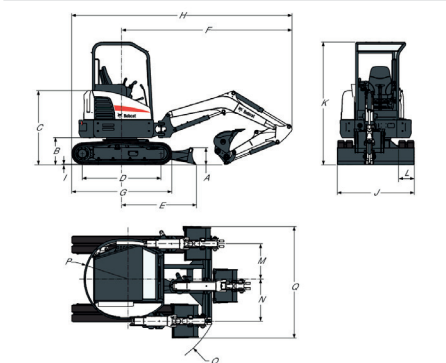

|     |           |     |           |
|-----|-----------|-----|-----------|
| (A) | 319.0 mm  | (J) | 1550.0 mm |
| (B) | 539.0 mm  | (K) | 2438.0 mm |
| (C) | 1540.0 mm | (L) | 300.0 mm  |
| (D) | 1543.0 mm | (M) | 565.0 mm  |
| (E) | 983.0 mm  | (N) | 773.0 mm  |
| (F) | 3345.0 mm | (O) | 1726.0 mm |
| (G) | 1965.0 mm | (P) | 864.0 mm  |
| (H) | 4327.0 mm | (Q) | 1808.0 mm |
| (I) | 21.0 mm   |     |           |



**Bobcat is a Doosan Company.**  
Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries.  
©2020 Bobcat Company. All Rights Reserved.



**Bobcat®**

[www.bobcat.com](http://www.bobcat.com)

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Bobcat units may show other than standard equipment.